

INDEX

| | |
|---|------------|
| EASY RAIL: THE SOLUTION IS EASY..... | D4 |
| EXAMPLES OF LOAD CAPACITIES..... | D5 |
| ORDER CODES..... | D6 |
| MOUNTING EXAMPLES..... | D7 |
| TECHNICAL DATA..... | D8 |
| STANDARD CONFIGURATIONS..... | D10 |
| VERIFICATION UNDER STATIC LOAD..... | D12 |
| LIFETIME CALCULATION..... | D13 |
| CLEARANCE AND PRELOAD..... | D13 |
| FRICTION COEFFICIENT..... | D13 |
| LINEAR PRECISION..... | D13 |
| SPEED..... | D13 |
| APPLICATION NOTES..... | D14 |
| TEMPERATURE..... | D14 |
| ANTICORROSIVE PROTECTION..... | D14 |
| LUBRICATION..... | D14 |

EASY RAIL: THE SOLUTION IS EASY

Simplicity is the distinguishing characteristic of this family of **steel linear bearings**. Designed to quickly and easily fit into demanding applications, these **simple yet durable** bearings confirm **ROLLON's** commitment to offering **innovative linear solutions** to real world applications.

Easy: these **versatile** rails solve extremely diverse and apparently complex problems of linear motion with ease. They are at home wherever **compactness, smooth movement, high load capacity**, and versatility are needed along with **affordability**; where **reliability is key** and where **ease of mounting** takes slight precedence over absolute **precision**. **EASY RAIL** solves problems. **EASY RAIL** contains five different sized sections – 22, 28, 35, 43, 63 mm – offering linear precision of up to 100 microns and load capacities of several thousand pounds per slider. With many different slider lengths available per section, several hundred different combinations of solutions are possible.

The three main components, the hardened rail, the hardened slider, and the ballcage, assembled in many different ways, are able to quickly resolve most needs whether based on load capacity or on stroke.

Assembled with particular care and attention, these **high-quality** slides can be **mounted quickly and easily** allowing notable saving in mounting time.


While the simplicity of these slides may be their most distinguishing characteristic, their numerous other advantages need mentioning:

Compactness. The slider always runs *inside* the **hardened steel races** of the rail – typical of Rollon's innovative products.

High Strength. The raceways of both slider and rail are always hardened. Combined with the hardened ball-bearings, these slides will carry **extremely high loads** with continual movements.


Reliability. The **quality** of both materials and workmanship allow these linear bearings to offer repeated, continual, inexpensive, and smooth movement even in severe conditions.

EASY RAIL products have been applied in the most varied of sectors. A few application examples: protective door enclosures, providing the movement in medical machinery such as X-ray tables, single or multiple axis manipulators. Wherever a heavy duty, compact, reliable, and affordable linear bearing is needed, the solution is EASY.

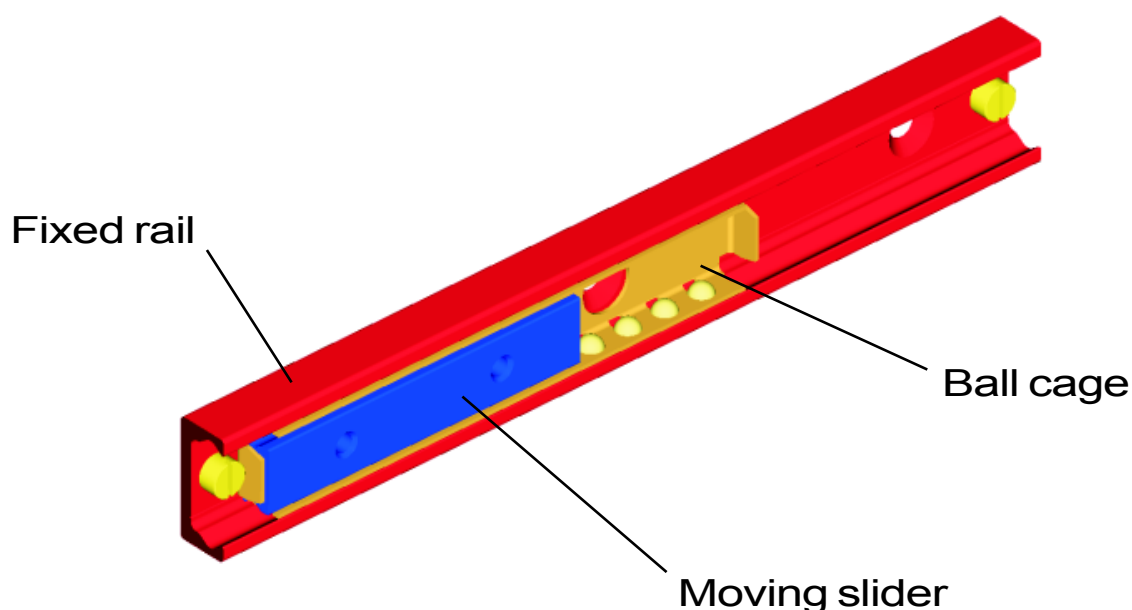

EXAMPLES OF LOAD CAPACITIES


• “SN22” SERIES



| Slider length [mm] | Load capacity | | | | | Slider length [mm] | Load capacity | | | | |
|--------------------|----------------|---------------|------------|------------|------------|--------------------|----------------|---------------|------------|------------|------------|
| | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] | | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] |
| 40 | 1320 | 924 | 8 | 6 | 9 | 130 | 4290 | 3003 | 26 | 65 | 93 |
| 60 | 1980 | 1386 | 12 | 14 | 20 | 210 | 6930 | 4851 | 42 | 170 | 243 |
| 80 | 2640 | 1848 | 16 | 25 | 35 | 290 | 9570 | 6699 | 58 | 324 | 463 |

| Rail length [mm] |
|---|
| 130, 210, 290, 370, 450, 530, 610, 690, 770, 850, 930, 1010, 1170 |


• “SN28” SERIES



| Slider length [mm] | Load capacity | | | | | Slider length [mm] | Load capacity | | | | |
|--------------------|----------------|---------------|------------|------------|------------|--------------------|----------------|---------------|------------|------------|------------|
| | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] | | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] |
| 60 | 3480 | 2436 | 28 | 24 | 35 | 290 | 16820 | 11774 | 136 | 569 | 813 |
| 80 | 4640 | 3248 | 38 | 43 | 62 | 370 | 21460 | 15022 | 174 | 926 | 1323 |
| 130 | 7540 | 5278 | 61 | 114 | 163 | 450 | 26100 | 18270 | 211 | 1370 | 1958 |
| 210 | 12180 | 8526 | 98 | 298 | 426 | | | | | | |

| Rail length [mm] |
|---|
| 130, 210, 290, 370, 450, 530, 610, 690, 770, 850, 930, 1010, 1170, 1330, 1490, 1650 |


• “SN35” SERIES



| Slider length [mm] | Load capacity | | | | | Slider length [mm] | Load capacity | | | | |
|--------------------|----------------|---------------|------------|------------|------------|--------------------|----------------|---------------|------------|------------|------------|
| | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] | | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] |
| 130 | 9750 | 6825 | 95 | 148 | 211 | 450 | 33750 | 23625 | 327 | 1772 | 2531 |
| 210 | 15750 | 11025 | 153 | 386 | 551 | 530 | 39750 | 27825 | 385 | 2458 | 3511 |
| 290 | 21750 | 15225 | 211 | 736 | 1051 | 610 | 45750 | 32025 | 444 | 3256 | 4651 |
| 370 | 27750 | 19425 | 269 | 1198 | 1711 | | | | | | |

| Rail length [mm] |
|---|
| 290, 370, 450, 530, 610, 690, 770, 850, 930, 1010, 1170, 1330, 1490, 1650, 1810 |


• “SN43” SERIES

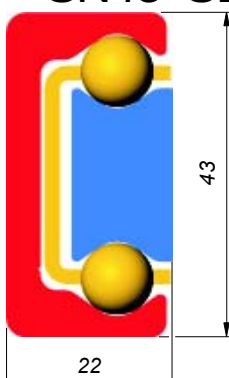

| Slider length [mm] | Load capacity | | | | | Slider length [mm] | Load capacity | | | | |
|--------------------|----------------|---------------|------------|------------|------------|--------------------|----------------|---------------|------------|------------|------------|
| | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] | | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] |
| 130 | 13910 | 9737 | 172 | 211 | 301 | 450 | 48150 | 33705 | 595 | 2528 | 3611 |
| 210 | 22470 | 15729 | 278 | 551 | 786 | 530 | 56710 | 39697 | 701 | 3507 | 5009 |
| 290 | 31030 | 21721 | 383 | 1050 | 1500 | 610 | 65270 | 45689 | 806 | 4645 | 6636 |
| 370 | 39590 | 27713 | 489 | 1709 | 2441 | | | | | | |

| Rail length [mm] |
|---|
| 290, 370, 450, 530, 610, 690, 770, 850, 930, 1010, 1170, 1330, 1490, 1650, 1810, 1970 |


• “SN63” SERIES

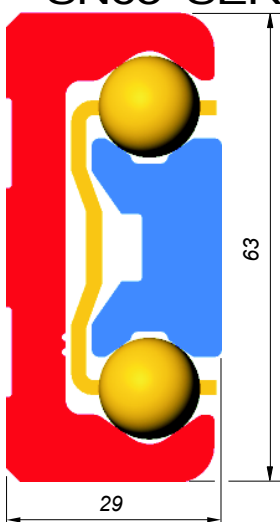

| Slider length [mm] | Load capacity | | | | | Slider length [mm] | Load capacity | | | | |
|--------------------|----------------|---------------|------------|------------|------------|--------------------|----------------|---------------|------------|------------|------------|
| | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] | | C_{0rad} [N] | C_{0ax} [N] | M_x [Nm] | M_y [Nm] | M_z [Nm] |
| 130 | 26000 | 18200 | 443 | 394 | 563 | 450 | 90000 | 63000 | 1534 | 4725 | 6750 |
| 210 | 42000 | 29400 | 716 | 1029 | 1470 | 530 | 106000 | 74200 | 1807 | 6554 | 9363 |
| 290 | 58000 | 40600 | 989 | 1962 | 2803 | 610 | 122000 | 85400 | 2079 | 8682 | 12403 |
| 370 | 74000 | 51800 | 1261 | 3194 | 4563 | | | | | | |

| Rail length [mm] |
|---|
| 610, 690, 770, 850, 930, 1010, 1170, 1330, 1490, 1650, 1810, 1970 |

For order codes see page D6.
For other technical data see pages D8, D9, D10, D11

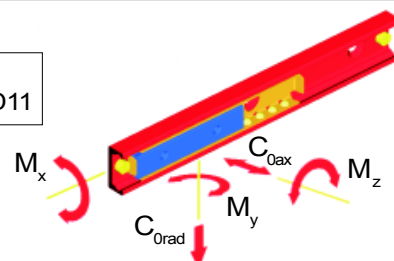


ORDER CODES

The **SN** series linear bearings are composed of three main elements. By combining the elements to fit your application requirements, you can order a standard product that fits the application as though it were custom made for it. The components are:



- A **cold-drawn**, C-shaped **steel rail** with **induction-hardened raceways**. The external dimensions of this compact rail are the same as the complete bearing since the other two elements move inside the **well-protected**, *internal* raceways. This rigid rail is often mounted to the fixed structure, with countersunk screws.
- One or more **cold-drawn steel sliders** with **induction hardened raceways**. The slider moves *inside* the C-shaped rail and is generally attached to the moving structure where it transfers the load to the rail through a double row of ball bearings. Threaded holes permit the sliders to be mounted to the moving structure.
- One or more steel **cages**, each with a **double row of high precision ball-bearings** made from bearing steel. The ballcage allows the slider to easily move inside the rail with almost no friction. There are three principle ways of combining these components to form standard yet seemingly custom fit linear bearings (for more detailed information and assistance, please contact our engineering department).

- SN SERIES WITH A SINGLE SLIDER:

This is the simplest and most popular combination (we refer to this combination on pages D8, D9, D10 and D11) with **one internal slider and ballcage running inside the rail**.

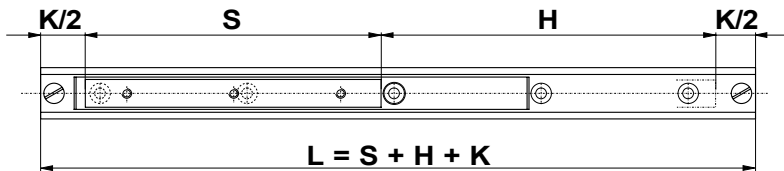


Order code:

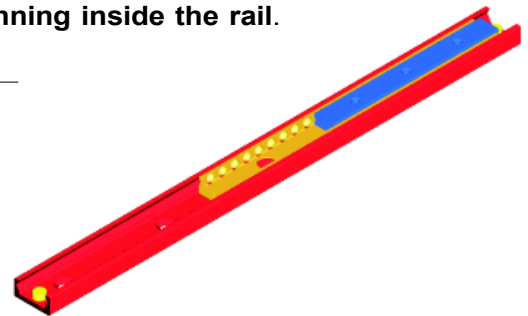



- SN SERIES WITH MULTIPLE "INDEPENDENT" SLIDERS:

Inside one rail are multiple sliders, each running inside its own ballcage. The multiple sliders have the same length and stroke but can move independently.

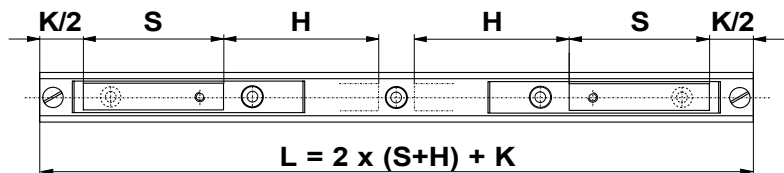


Order code:

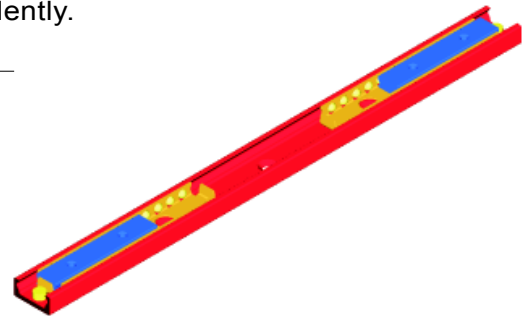
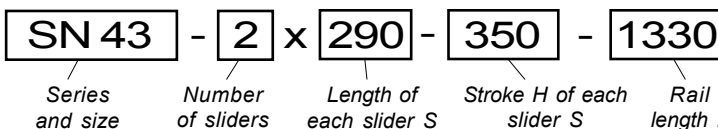


- SN SERIES WITH MULTIPLE "SYNCHRONIZED" SLIDERS:

Inside one rail are multiple sliders, each running inside the same ballcage. The multiple sliders can be of different lengths and can be spaced apart.

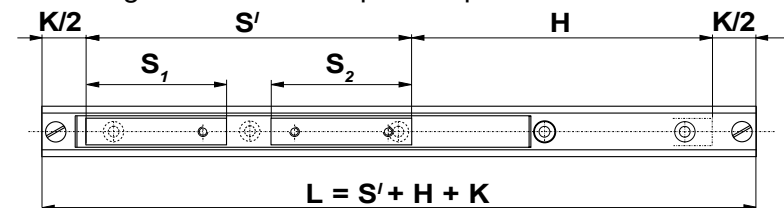

Order code:

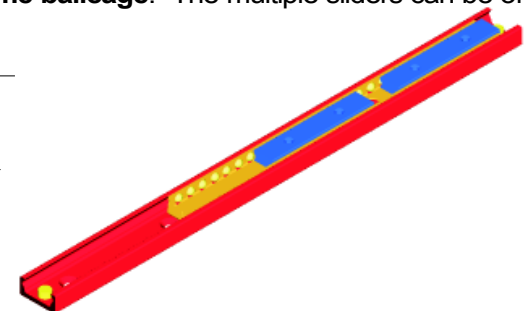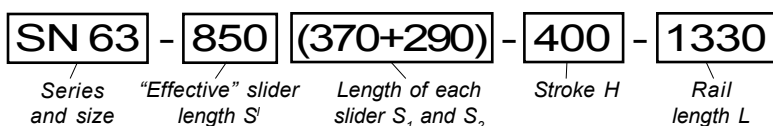

For all technical data, see pages D8, D9, D10 and D11




MOUNTING EXAMPLES

With regard to the external load, the rail may be used in both the positions shown in the diagrams at right. However, when it is used in the position shown in the diagram 2 (axially) the load capacity will be reduced to 70% of the radial capacity C_{Orad} (see also **Verification under static load** on page D12).


The number of fixing holes in standard length rails is sufficient to support the stated loads, provided that the track-rails are fixed with screws having a minimum quality of class 10.9. **The fixed rail and slider assume the stiffness as the structure to which they are mounted.** Therefore they must both be mounted to rigid structures with suitably strong screws.

An angled, adjustable support as shown at right is not necessary but will reduce the shear stress on the screws and will increase the stiffness of the system. Flush-mounted or non-adjustable supports, like those shown in the two diagrams at right, cannot guarantee support of the rail because countersunk screws must be used for fixing.


Stroke end stops must be fitted on the moving element of the machine. The built-in stops on the ball bearings are only in place to prevent dismantling and **are not suitable** for use as stroke end stops on the machine. We also suggest that there are slotted fixing holes on the machine part connecting to the slider.

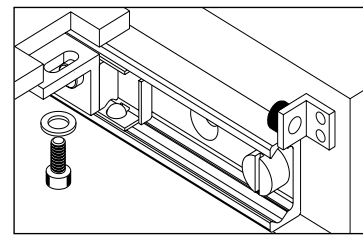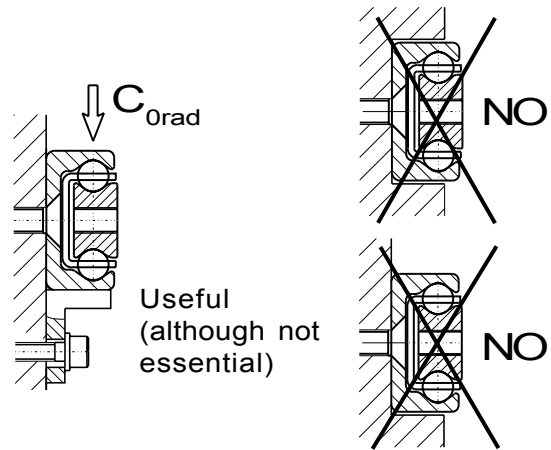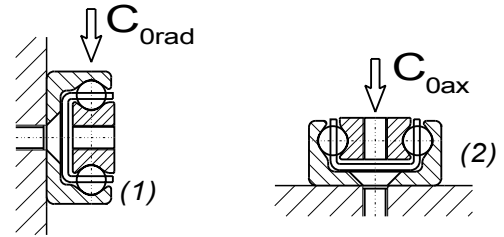

- APPLICATION "IDEAS": MEANS OF TRANSPORT DOORS

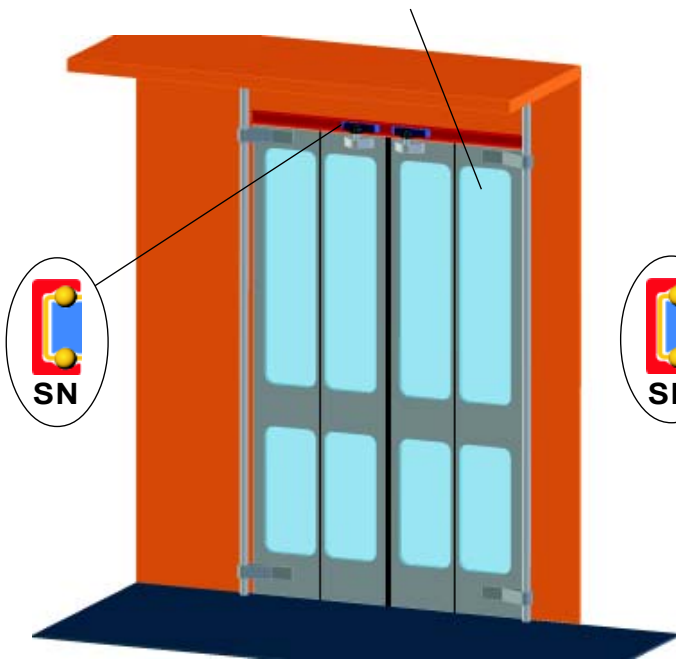


MACHINE TOOLS (PROTECTIVE ENCLOSURES)

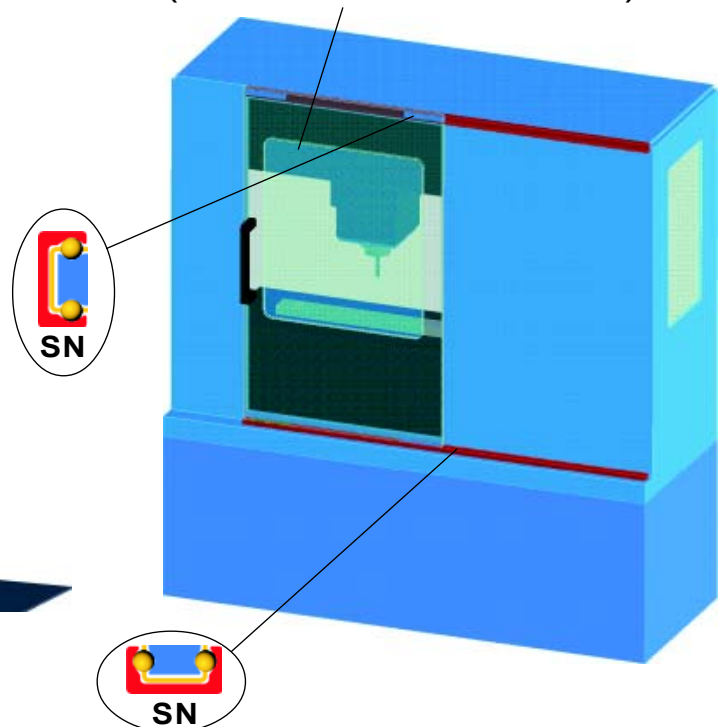

Other important application fields are packaging machines, medical equipment etc.

TECHNICAL DATA


By combining the three main standard components with the rules listed below, it is possible to obtain standard linear bearings that are custom fit to each application (for **order codes** see page D6, for **standard configurations**, see pages D10 and D11).

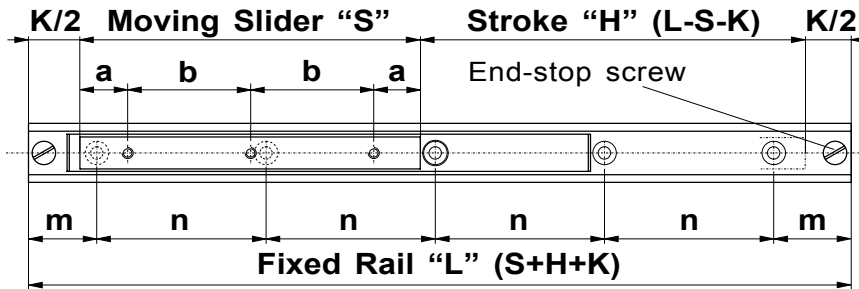

KEY RULES:

1. To ensure access to all mounting holes in the rail, it is necessary that $S \leq L/2 - K$. This means that the slider length must be less than or equal to half of the rail length minus a constant "K" (different for each size).
 2. To help choose the right rail length it is necessary to remember that $L = S + H + K$. In other words, the length of the slider plus the stroke plus the constant "K" must always equal the total rail length.
 3. To ensure proper smooth movement, it is necessary that $H \leq 7S$. This means that the maximum theoretical stroke can never exceed seven times the slider length S (this maximum theoretical stroke is not always reachable with the standard rail lengths listed below. The maximum *real* stroke possible is limited by Rule 2).
- Example:* choosing the 130 mm slider for an **SN28**, the maximum theoretical stroke is 910 mm (Rule 3). In actuality, a standard SN28-130-... can only have a *real* max. stroke H of 840 mm (Rule 2: 1030+840+40=1010mm). If the next longer rail (1170 mm) had been chosen, the obtainable stroke would be 1000 mm, longer than the allowable value (violating Rule 3). The correct code is therefore **SN28-130-840-1010**. (See page D6 for more)

• "SN22" SERIES



Ordering Example:
 - Moving slider **S**: 210 mm;
 - Required stroke **H**: 610 mm;
 - Fixed rail **L**: 210 + 610 + 30 = 850 mm
 (see Rule 2 above). The correct order code is therefore: **SN22-210-610-850**.


| Moving Slider | | | | Load capacity | | | | |
|---------------|--------|--------|----------|-----------------------|----------------------|---------------------|---------------------|---------------------|
| S [mm] | a [mm] | b [mm] | N. holes | C _{0rad} [N] | C _{0ax} [N] | M _x [Nm] | M _y [Nm] | M _z [Nm] |
| 40 | 10 | 20 | 2 | 1320 | 924 | 8 | 6 | 9 |
| 60 | 10 | 20 | 3 | 1980 | 1386 | 12 | 14 | 20 |
| 80 | 10 | 20 | 4 | 2640 | 1848 | 16 | 25 | 35 |
| 130 | 25 | 80 | 2 | 4290 | 3003 | 26 | 65 | 93 |
| 210 | 25 | 80 | 3 | 6930 | 4851 | 42 | 170 | 243 |
| 290 | 25 | 80 | 4 | 9570 | 6699 | 58 | 324 | 463 |

Moving Slider weight: 1.0 g/mm

| Fixed Rail | | | | | Fixed Rail | | | | |
|------------|--------|--------|----------|--------|------------|--------|--------|----------|--------|
| L [mm] | m [mm] | n [mm] | N. holes | K [mm] | L [mm] | m [mm] | n [mm] | N. holes | K [mm] |
| 130 | 25 | 80 | 2 | 30 | 690 | 25 | 80 | 9 | 30 |
| 210 | 25 | 80 | 3 | 30 | 770 | 25 | 80 | 10 | 30 |
| 290 | 25 | 80 | 4 | 30 | 850 | 25 | 80 | 11 | 30 |
| 370 | 25 | 80 | 5 | 30 | 930 | 25 | 80 | 12 | 30 |
| 450 | 25 | 80 | 6 | 30 | 1010 | 25 | 80 | 13 | 30 |
| 530 | 25 | 80 | 7 | 30 | 1170 | 25 | 80 | 15 | 30 |
| 610 | 25 | 80 | 8 | 30 | | | | | |

Fixed Rail weight: 0.7 g/mm

• "SN28" SERIES

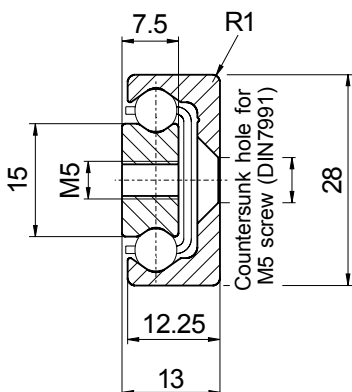


| Moving Slider | | | | Load Capacity | | | | |
|---------------|--------|--------|----------|-----------------------|----------------------|---------------------|---------------------|---------------------|
| S [mm] | a [mm] | b [mm] | N. holes | C _{0rad} [N] | C _{0ax} [N] | M _x [Nm] | M _y [Nm] | M _z [Nm] |
| 60 | 10 | 20 | 3 | 3480 | 2436 | 28 | 24 | 35 |
| 80 | 10 | 20 | 4 | 4640 | 3248 | 38 | 43 | 62 |
| 130 | 25 | 80 | 2 | 7540 | 5278 | 61 | 114 | 163 |
| 210 | 25 | 80 | 3 | 12180 | 8526 | 98 | 298 | 426 |
| 290 | 25 | 80 | 4 | 16820 | 11774 | 136 | 569 | 813 |
| 370 | 25 | 80 | 5 | 21460 | 15022 | 174 | 926 | 1323 |
| 450 | 25 | 80 | 6 | 26100 | 18270 | 211 | 1370 | 1958 |

Moving Slider weight: 1.5 g/mm

| Fixed Rail | | | | | Fixed Rail | | | | |
|------------|--------|--------|----------|--------|------------|--------|--------|----------|--------|
| L [mm] | m [mm] | n [mm] | N. holes | K [mm] | L [mm] | m [mm] | n [mm] | N. holes | K [mm] |
| 130 | 25 | 80 | 2 | 40 | 770 | 25 | 80 | 10 | 40 |
| 210 | 25 | 80 | 3 | 40 | 850 | 25 | 80 | 11 | 40 |
| 290 | 25 | 80 | 4 | 40 | 930 | 25 | 80 | 12 | 40 |
| 370 | 25 | 80 | 5 | 40 | 1010 | 25 | 80 | 13 | 40 |
| 450 | 25 | 80 | 6 | 40 | 1170 | 25 | 80 | 15 | 40 |
| 530 | 25 | 80 | 7 | 40 | 1330 | 25 | 80 | 17 | 40 |
| 610 | 25 | 80 | 8 | 40 | 1490 | 25 | 80 | 19 | 40 |
| 690 | 25 | 80 | 9 | 40 | 1650 | 25 | 80 | 21 | 40 |

Fixed Rail weight: 1.0 g/mm

• “SN35” SERIES

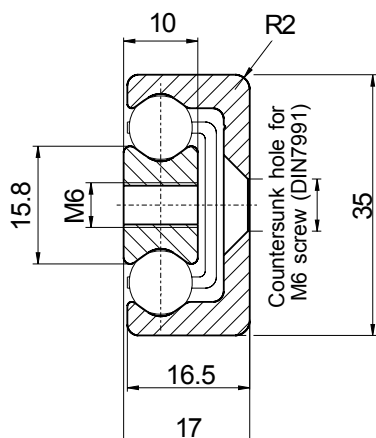


| Moving Slider | | | | Load Capacity | | | | |
|---------------|--------|--------|----------|-----------------------|----------------------|---------------------|---------------------|---------------------|
| S [mm] | a [mm] | b [mm] | N. holes | C _{0rad} [N] | C _{0ax} [N] | M _x [Nm] | M _y [Nm] | M _z [Nm] |
| 130 | 25 | 80 | 2 | 9750 | 6825 | 95 | 148 | 211 |
| 210 | 25 | 80 | 3 | 15750 | 11025 | 153 | 386 | 551 |
| 290 | 25 | 80 | 4 | 21750 | 15225 | 211 | 736 | 1051 |
| 370 | 25 | 80 | 5 | 27750 | 19425 | 269 | 1198 | 1711 |
| 450 | 25 | 80 | 6 | 33750 | 23625 | 327 | 1772 | 2531 |
| 530 | 25 | 80 | 7 | 39750 | 27825 | 385 | 2458 | 3511 |
| 610 | 25 | 80 | 8 | 45750 | 32025 | 444 | 3256 | 4651 |

Moving Slider weight:
2.5 g/mm

| Fixed Rail | | | | | Fixed Rail | | | | |
|------------|--------|--------|----------|--------|------------|--------|--------|----------|--------|
| L [mm] | m [mm] | n [mm] | N. holes | K [mm] | L [mm] | m [mm] | n [mm] | N. holes | K [mm] |
| 290 | 25 | 80 | 4 | 50 | 930 | 25 | 80 | 12 | 50 |
| 370 | 25 | 80 | 5 | 50 | 1010 | 25 | 80 | 13 | 50 |
| 450 | 25 | 80 | 6 | 50 | 1170 | 25 | 80 | 15 | 50 |
| 530 | 25 | 80 | 7 | 50 | 1330 | 25 | 80 | 17 | 50 |
| 610 | 25 | 80 | 8 | 50 | 1490 | 25 | 80 | 19 | 50 |
| 690 | 25 | 80 | 9 | 50 | 1650 | 25 | 80 | 21 | 50 |
| 770 | 25 | 80 | 10 | 50 | 1810 | 25 | 80 | 23 | 50 |
| 850 | 25 | 80 | 11 | 50 | | | | | |

Fixed Rail weight:
1.8 g/mm

• “SN43” SERIES

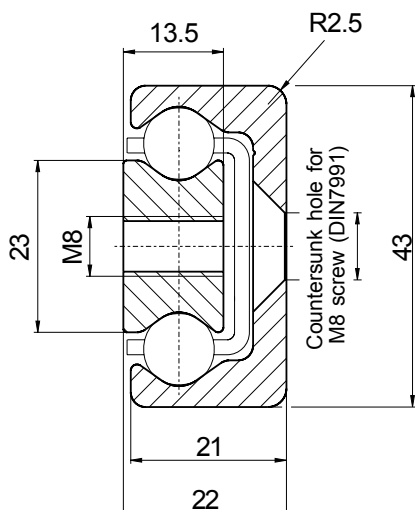


| Moving Slider | | | | Load Capacity | | | | |
|---------------|--------|--------|----------|-----------------------|----------------------|---------------------|---------------------|---------------------|
| S [mm] | a [mm] | b [mm] | N. holes | C _{0rad} [N] | C _{0ax} [N] | M _x [Nm] | M _y [Nm] | M _z [Nm] |
| 130 | 25 | 80 | 2 | 13910 | 9737 | 172 | 211 | 301 |
| 210 | 25 | 80 | 3 | 22470 | 15729 | 278 | 551 | 786 |
| 290 | 25 | 80 | 4 | 31030 | 21721 | 383 | 1050 | 1500 |
| 370 | 25 | 80 | 5 | 39590 | 27713 | 489 | 1709 | 2441 |
| 450 | 25 | 80 | 6 | 48150 | 33705 | 595 | 2528 | 3611 |
| 530 | 25 | 80 | 7 | 56710 | 39697 | 701 | 3507 | 5009 |
| 610 | 25 | 80 | 8 | 65270 | 45689 | 806 | 4645 | 6636 |

Moving Slider weight:
5.0 g/mm

| Fixed Rail | | | | | Fixed Rail | | | | |
|------------|--------|--------|----------|--------|------------|--------|--------|----------|--------|
| L [mm] | m [mm] | n [mm] | N. holes | K [mm] | L [mm] | m [mm] | n [mm] | N. holes | K [mm] |
| 290 | 25 | 80 | 4 | 50 | 930 | 25 | 80 | 12 | 50 |
| 370 | 25 | 80 | 5 | 50 | 1010 | 25 | 80 | 13 | 50 |
| 450 | 25 | 80 | 6 | 50 | 1170 | 25 | 80 | 15 | 50 |
| 530 | 25 | 80 | 7 | 50 | 1330 | 25 | 80 | 17 | 50 |
| 610 | 25 | 80 | 8 | 50 | 1490 | 25 | 80 | 19 | 50 |
| 690 | 25 | 80 | 9 | 50 | 1650 | 25 | 80 | 21 | 50 |
| 770 | 25 | 80 | 10 | 50 | 1810 | 25 | 80 | 23 | 50 |
| 850 | 25 | 80 | 11 | 50 | 1970 | 25 | 80 | 25 | 50 |

Fixed Rail weight:
2.6 g/mm

• “SN63” SERIES

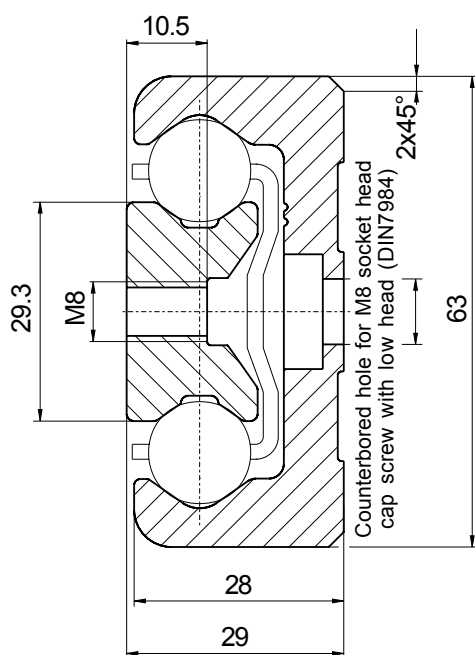

| Moving Slider | | | | Load Capacity | | | | |
|---------------|--------|--------|----------|-----------------------|----------------------|---------------------|---------------------|---------------------|
| S [mm] | a [mm] | b [mm] | N. holes | C _{0rad} [N] | C _{0ax} [N] | M _x [Nm] | M _y [Nm] | M _z [Nm] |
| 130 | 25 | 80 | 2 | 26000 | 18200 | 443 | 394 | 563 |
| 210 | 25 | 80 | 3 | 42000 | 29400 | 716 | 1029 | 1470 |
| 290 | 25 | 80 | 4 | 58000 | 40600 | 989 | 1962 | 2803 |
| 370 | 25 | 80 | 5 | 74000 | 51800 | 1261 | 3194 | 4563 |
| 450 | 25 | 80 | 6 | 90000 | 63000 | 1534 | 4725 | 6750 |
| 530 | 25 | 80 | 7 | 106000 | 74200 | 1807 | 6554 | 9363 |
| 610 | 25 | 80 | 8 | 122000 | 85400 | 2079 | 8682 | 12403 |

Moving Slider weight:
6.9 g/mm

| Fixed Rail | | | | | Fixed Rail | | | | |
|------------|--------|--------|----------|--------|------------|--------|--------|----------|--------|
| L [mm] | m [mm] | n [mm] | N. holes | K [mm] | L [mm] | m [mm] | n [mm] | N. holes | K [mm] |
| 610 | 25 | 80 | 8 | 80 | 1170 | 25 | 80 | 15 | 80 |
| 690 | 25 | 80 | 9 | 80 | 1330 | 25 | 80 | 17 | 80 |
| 770 | 25 | 80 | 10 | 80 | 1490 | 25 | 80 | 19 | 80 |
| 850 | 25 | 80 | 11 | 80 | 1650 | 25 | 80 | 21 | 80 |
| 930 | 25 | 80 | 12 | 80 | 1810 | 25 | 80 | 23 | 80 |
| 1010 | 25 | 80 | 13 | 80 | 1970 | 25 | 80 | 25 | 80 |

Fixed Rail weight:
6.1 g/mm

STANDARD CONFIGURATIONS

SN22 SERIES

| Order Code | Slider | Stroke | Rail |
|------------------|--------|--------|------|
| SN22-40-60-130 | 40 | 60 | 130 |
| SN22-40-140-210 | 40 | 140 | 210 |
| SN22-40-220-290 | 40 | 220 | 290 |
| SN22-60-40-130 | 60 | 40 | 130 |
| SN22-60-120-210 | 60 | 120 | 210 |
| SN22-60-200-290 | 60 | 200 | 290 |
| SN22-60-280-370 | 60 | 280 | 370 |
| SN22-60-360-450 | 60 | 360 | 450 |
| SN22-80-100-210 | 80 | 100 | 210 |
| SN22-80-180-290 | 80 | 180 | 290 |
| SN22-80-260-370 | 80 | 260 | 370 |
| SN22-80-340-450 | 80 | 340 | 450 |
| SN22-80-420-530 | 80 | 420 | 530 |
| SN22-80-500-610 | 80 | 500 | 610 |
| SN22-130-130-290 | 130 | 130 | 290 |
| SN22-130-210-370 | 130 | 210 | 370 |
| SN22-130-290-450 | 130 | 290 | 450 |
| SN22-130-370-530 | 130 | 370 | 530 |
| SN22-130-450-610 | 130 | 450 | 610 |
| SN22-130-530-690 | 130 | 530 | 690 |

| Order Code | Slider | Stroke | Rail |
|-------------------|--------|--------|------|
| SN22-130-610-770 | 130 | 610 | 770 |
| SN22-130-690-850 | 130 | 690 | 850 |
| SN22-130-770-930 | 130 | 770 | 930 |
| SN22-130-850-1010 | 130 | 850 | 1010 |
| SN22-210-210-450 | 210 | 210 | 450 |
| SN22-210-290-530 | 210 | 290 | 530 |
| SN22-210-370-610 | 210 | 370 | 610 |
| SN22-210-450-690 | 210 | 450 | 690 |
| SN22-210-530-770 | 210 | 530 | 770 |
| SN22-210-610-850 | 210 | 610 | 850 |
| SN22-210-690-930 | 210 | 690 | 930 |
| SN22-210-770-1010 | 210 | 770 | 1010 |
| SN22-210-930-1170 | 210 | 930 | 1170 |
| SN22-290-290-610 | 290 | 290 | 610 |
| SN22-290-370-690 | 290 | 370 | 690 |
| SN22-290-450-770 | 290 | 450 | 770 |
| SN22-290-530-850 | 290 | 530 | 850 |
| SN22-290-610-930 | 290 | 610 | 930 |
| SN22-290-690-1010 | 290 | 690 | 1010 |
| SN22-290-850-1170 | 290 | 850 | 1170 |

SN28 SERIES

| Order code | Slider | Stroke | Rail |
|-------------------|--------|--------|------|
| SN28-60-30-130 | 60 | 30 | 130 |
| SN28-60-110-210 | 60 | 110 | 210 |
| SN28-60-190-290 | 60 | 190 | 290 |
| SN28-60-270-370 | 60 | 270 | 370 |
| SN28-60-350-450 | 60 | 350 | 450 |
| SN28-80-90-210 | 80 | 90 | 210 |
| SN28-80-170-290 | 80 | 170 | 290 |
| SN28-80-250-370 | 80 | 250 | 370 |
| SN28-80-330-450 | 80 | 330 | 450 |
| SN28-80-410-530 | 80 | 410 | 530 |
| SN28-80-490-610 | 80 | 490 | 610 |
| SN28-130-120-290 | 130 | 120 | 290 |
| SN28-130-200-370 | 130 | 200 | 370 |
| SN28-130-280-450 | 130 | 280 | 450 |
| SN28-130-360-530 | 130 | 360 | 530 |
| SN28-130-440-610 | 130 | 440 | 610 |
| SN28-130-520-690 | 130 | 520 | 690 |
| SN28-130-600-770 | 130 | 600 | 770 |
| SN28-130-680-850 | 130 | 680 | 850 |
| SN28-130-760-930 | 130 | 760 | 930 |
| SN28-130-840-1010 | 130 | 840 | 1010 |
| SN28-210-200-450 | 210 | 200 | 450 |
| SN28-210-280-530 | 210 | 280 | 530 |
| SN28-210-360-610 | 210 | 360 | 610 |
| SN28-210-440-690 | 210 | 440 | 690 |
| SN28-210-520-770 | 210 | 520 | 770 |
| SN28-210-600-850 | 210 | 600 | 850 |

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN28-210-680-930 | 210 | 680 | 930 |
| SN28-210-760-1010 | 210 | 760 | 1010 |
| SN28-210-920-1170 | 210 | 920 | 1170 |
| SN28-210-1080-1330 | 210 | 1080 | 1330 |
| SN28-290-280-610 | 290 | 280 | 610 |
| SN28-290-360-690 | 290 | 360 | 690 |
| SN28-290-440-770 | 290 | 440 | 770 |
| SN28-290-520-850 | 290 | 520 | 850 |
| SN28-290-600-930 | 290 | 600 | 930 |
| SN28-290-680-1010 | 290 | 680 | 1010 |
| SN28-290-840-1170 | 290 | 840 | 1170 |
| SN28-290-1000-1330 | 290 | 1000 | 1330 |
| SN28-290-1160-1490 | 290 | 1160 | 1490 |
| SN28-370-360-770 | 370 | 360 | 770 |
| SN28-370-440-850 | 370 | 440 | 850 |
| SN28-370-520-930 | 370 | 520 | 930 |
| SN28-370-600-1010 | 370 | 600 | 1010 |
| SN28-370-760-1170 | 370 | 760 | 1170 |
| SN28-370-920-1330 | 370 | 920 | 1330 |
| SN28-370-1080-1490 | 370 | 1080 | 1490 |
| SN28-450-440-930 | 450 | 440 | 930 |
| SN28-450-520-1010 | 450 | 520 | 1010 |
| SN28-450-680-1170 | 450 | 680 | 1170 |
| SN28-450-840-1330 | 450 | 840 | 1330 |
| SN28-450-1000-1490 | 450 | 1000 | 1490 |
| SN28-450-1160-1650 | 450 | 1160 | 1650 |

SN35 SERIES

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN35-130-110-290 | 130 | 110 | 290 |
| SN35-130-190-370 | 130 | 190 | 370 |
| SN35-130-270-450 | 130 | 270 | 450 |
| SN35-130-350-530 | 130 | 350 | 530 |
| SN35-130-430-610 | 130 | 430 | 610 |
| SN35-130-510-690 | 130 | 510 | 690 |
| SN35-130-590-770 | 130 | 590 | 770 |
| SN35-130-670-850 | 130 | 670 | 850 |
| SN35-130-750-930 | 130 | 750 | 930 |
| SN35-130-830-1010 | 130 | 830 | 1010 |
| SN35-210-190-450 | 210 | 190 | 450 |
| SN35-210-270-530 | 210 | 270 | 530 |
| SN35-210-350-610 | 210 | 350 | 610 |
| SN35-210-430-690 | 210 | 430 | 690 |
| SN35-210-510-770 | 210 | 510 | 770 |
| SN35-210-590-850 | 210 | 590 | 850 |
| SN35-210-670-930 | 210 | 670 | 930 |
| SN35-210-750-1010 | 210 | 750 | 1010 |
| SN35-210-910-1170 | 210 | 910 | 1170 |
| SN35-210-1070-1330 | 210 | 1070 | 1330 |
| SN35-210-1230-1490 | 210 | 1230 | 1490 |
| SN35-290-270-610 | 290 | 270 | 610 |
| SN35-290-350-690 | 290 | 350 | 690 |
| SN35-290-430-770 | 290 | 430 | 770 |
| SN35-290-510-850 | 290 | 510 | 850 |
| SN35-290-590-930 | 290 | 590 | 930 |
| SN35-290-670-1010 | 290 | 670 | 1010 |
| SN35-290-830-1170 | 290 | 830 | 1170 |

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN35-290-990-1330 | 290 | 990 | 1330 |
| SN35-290-1150-1490 | 290 | 1150 | 1490 |
| SN35-290-1310-1650 | 290 | 1310 | 1650 |
| SN35-370-350-770 | 370 | 350 | 770 |
| SN35-370-430-850 | 370 | 430 | 850 |
| SN35-370-510-930 | 370 | 510 | 930 |
| SN35-370-590-1010 | 370 | 590 | 1010 |
| SN35-370-750-1170 | 370 | 750 | 1170 |
| SN35-370-910-1330 | 370 | 910 | 1330 |
| SN35-370-1070-1490 | 370 | 1070 | 1490 |
| SN35-370-1230-1650 | 370 | 1230 | 1650 |
| SN35-450-430-930 | 450 | 430 | 930 |
| SN35-450-510-1010 | 450 | 510 | 1010 |
| SN35-450-670-1170 | 450 | 670 | 1170 |
| SN35-450-830-1330 | 450 | 830 | 1330 |
| SN35-450-990-1490 | 450 | 990 | 1490 |
| SN35-450-1150-1650 | 450 | 1150 | 1650 |
| SN35-450-1310-1810 | 450 | 1310 | 1810 |
| SN35-530-590-1170 | 530 | 590 | 1170 |
| SN35-530-750-1330 | 530 | 750 | 1330 |
| SN35-530-910-1490 | 530 | 910 | 1490 |
| SN35-530-1070-1650 | 530 | 1070 | 1650 |
| SN35-530-1230-1810 | 530 | 1230 | 1810 |
| SN35-610-670-1330 | 610 | 670 | 1330 |
| SN35-610-830-1490 | 610 | 830 | 1490 |
| SN35-610-990-1650 | 610 | 990 | 1650 |
| SN35-610-1150-1810 | 610 | 1150 | 1810 |



SN43 SERIES

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN43-130-110-290 | 130 | 110 | 290 |
| SN43-130-190-370 | 130 | 190 | 370 |
| SN43-130-270-450 | 130 | 270 | 450 |
| SN43-130-350-530 | 130 | 350 | 530 |
| SN43-130-430-610 | 130 | 430 | 610 |
| SN43-130-510-690 | 130 | 510 | 690 |
| SN43-130-590-770 | 130 | 590 | 770 |
| SN43-130-670-850 | 130 | 670 | 850 |
| SN43-130-750-930 | 130 | 750 | 930 |
| SN43-130-830-1010 | 130 | 830 | 1010 |
| SN43-210-190-450 | 210 | 190 | 450 |
| SN43-210-270-530 | 210 | 270 | 530 |
| SN43-210-350-610 | 210 | 350 | 610 |
| SN43-210-430-690 | 210 | 430 | 690 |
| SN43-210-510-770 | 210 | 510 | 770 |
| SN43-210-590-850 | 210 | 590 | 850 |
| SN43-210-670-930 | 210 | 670 | 930 |
| SN43-210-750-1010 | 210 | 750 | 1010 |
| SN43-210-910-1170 | 210 | 910 | 1170 |
| SN43-210-1070-1330 | 210 | 1070 | 1330 |
| SN43-210-1230-1490 | 210 | 1230 | 1490 |
| SN43-210-1390-1650 | 210 | 1390 | 1650 |
| SN43-290-270-610 | 290 | 270 | 610 |
| SN43-290-350-690 | 290 | 350 | 690 |
| SN43-290-430-770 | 290 | 430 | 770 |
| SN43-290-510-850 | 290 | 510 | 850 |
| SN43-290-590-930 | 290 | 590 | 930 |
| SN43-290-670-1010 | 290 | 670 | 1010 |
| SN43-290-830-1170 | 290 | 830 | 1170 |
| SN43-290-990-1330 | 290 | 990 | 1330 |
| SN43-290-1150-1490 | 290 | 1150 | 1490 |

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN43-290-1310-1650 | 290 | 1310 | 1650 |
| SN43-290-1470-1810 | 290 | 1470 | 1810 |
| SN43-370-350-770 | 370 | 350 | 770 |
| SN43-370-430-850 | 370 | 430 | 850 |
| SN43-370-510-930 | 370 | 510 | 930 |
| SN43-370-590-1010 | 370 | 590 | 1010 |
| SN43-370-750-1170 | 370 | 750 | 1170 |
| SN43-370-910-1330 | 370 | 910 | 1330 |
| SN43-370-1070-1490 | 370 | 1070 | 1490 |
| SN43-370-1230-1650 | 370 | 1230 | 1650 |
| SN43-370-1390-1810 | 370 | 1390 | 1810 |
| SN43-450-430-930 | 450 | 430 | 930 |
| SN43-450-510-1010 | 450 | 510 | 1010 |
| SN43-450-670-1170 | 450 | 670 | 1170 |
| SN43-450-830-1330 | 450 | 830 | 1330 |
| SN43-450-990-1490 | 450 | 990 | 1490 |
| SN43-450-1150-1650 | 450 | 1150 | 1650 |
| SN43-450-1310-1810 | 450 | 1310 | 1810 |
| SN43-450-1470-1970 | 450 | 1470 | 1970 |
| SN43-530-590-1170 | 530 | 590 | 1170 |
| SN43-530-750-1330 | 530 | 750 | 1330 |
| SN43-530-910-1490 | 530 | 910 | 1490 |
| SN43-530-1070-1650 | 530 | 1070 | 1650 |
| SN43-530-1230-1810 | 530 | 1230 | 1810 |
| SN43-530-1390-1970 | 530 | 1390 | 1970 |
| SN43-610-670-1330 | 610 | 670 | 1330 |
| SN43-610-830-1490 | 610 | 830 | 1490 |
| SN43-610-990-1650 | 610 | 990 | 1650 |
| SN43-610-1150-1810 | 610 | 1150 | 1810 |
| SN43-610-1310-1970 | 610 | 1310 | 1970 |

SN63 SERIES

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN63-130-400-610 | 130 | 400 | 610 |
| SN63-130-480-690 | 130 | 480 | 690 |
| SN63-130-560-770 | 130 | 560 | 770 |
| SN63-130-640-850 | 130 | 640 | 850 |
| SN63-130-720-930 | 130 | 720 | 930 |
| SN63-130-800-1010 | 130 | 800 | 1010 |
| SN63-210-320-610 | 210 | 320 | 610 |
| SN63-210-400-690 | 210 | 400 | 690 |
| SN63-210-480-770 | 210 | 480 | 770 |
| SN63-210-560-850 | 210 | 560 | 850 |
| SN63-210-640-930 | 210 | 640 | 930 |
| SN63-210-720-1010 | 210 | 720 | 1010 |
| SN63-210-880-1170 | 210 | 880 | 1170 |
| SN63-210-1040-1330 | 210 | 1040 | 1330 |
| SN63-210-1200-1490 | 210 | 1200 | 1490 |
| SN63-210-1360-1650 | 210 | 1360 | 1650 |
| SN63-290-240-610 | 290 | 240 | 610 |
| SN63-290-320-690 | 290 | 320 | 690 |
| SN63-290-400-770 | 290 | 400 | 770 |
| SN63-290-480-850 | 290 | 480 | 850 |
| SN63-290-560-930 | 290 | 560 | 930 |
| SN63-290-640-1010 | 290 | 640 | 1010 |
| SN63-290-800-1170 | 290 | 800 | 1170 |
| SN63-290-960-1330 | 290 | 960 | 1330 |
| SN63-290-1120-1490 | 290 | 1120 | 1490 |
| SN63-290-1280-1650 | 290 | 1280 | 1650 |
| SN63-370-320-770 | 370 | 320 | 770 |

| Order Code | Slider | Stroke | Rail |
|--------------------|--------|--------|------|
| SN63-370-400-850 | 370 | 400 | 850 |
| SN63-370-480-930 | 370 | 480 | 930 |
| SN63-370-560-1010 | 370 | 560 | 1010 |
| SN63-370-720-1170 | 370 | 720 | 1170 |
| SN63-370-880-1330 | 370 | 880 | 1330 |
| SN63-370-1040-1490 | 370 | 1040 | 1490 |
| SN63-370-1200-1650 | 370 | 1200 | 1650 |
| SN63-370-1360-1810 | 370 | 1360 | 1810 |
| SN63-450-400-930 | 450 | 400 | 930 |
| SN63-450-480-1010 | 450 | 480 | 1010 |
| SN63-450-640-1170 | 450 | 640 | 1170 |
| SN63-450-800-1330 | 450 | 800 | 1330 |
| SN63-450-960-1490 | 450 | 960 | 1490 |
| SN63-450-1120-1650 | 450 | 1120 | 1650 |
| SN63-450-1280-1810 | 450 | 1280 | 1810 |
| SN63-530-560-1170 | 530 | 560 | 1170 |
| SN63-530-720-1330 | 530 | 720 | 1330 |
| SN63-530-880-1490 | 530 | 880 | 1490 |
| SN63-530-1040-1650 | 530 | 1040 | 1650 |
| SN63-530-1200-1810 | 530 | 1200 | 1810 |
| SN63-530-1360-1970 | 530 | 1360 | 1970 |
| SN63-610-640-1330 | 610 | 640 | 1330 |
| SN63-610-800-1490 | 610 | 800 | 1490 |
| SN63-610-960-1650 | 610 | 960 | 1650 |
| SN63-610-1120-1810 | 610 | 1120 | 1810 |
| SN63-610-1280-1970 | 610 | 1280 | 1970 |



VERIFICATION UNDER STATIC LOAD

The load capacities of the **SN** series linear ball bearings are based on slider lengths and are shown on the tables on the previous pages. The loads and moments should be centered on the slider (for uncentered loads and moments, please see the paragraph at the bottom of this page). In the **SN** series the values of the loads and moments are independent from the slider position during the stroke.

By static verification, the radial load C_{0rad} , the axial load C_{0ax} and the moments M_x, M_y, M_z , give the maximum permissible value for the load, beyond which the rolling quality and the total mechanical strength may be compromised. Verification under static load has to be carried out by determining the necessary safety factor **z** which corresponds most closely to the actual loads and working conditions shown in the table below.

| | |
|---|---------|
| Neither shocks nor vibrations, smooth and low frequency reverse, high precision in assembly, no elastic yielding; | 1 - 1.5 |
| Normal assembly conditions; | 1.5 - 2 |
| Shocks and vibrations, significant elastic yield, high frequency reverse; | 2 - 3.5 |

Verification must be made to ensure that the external load **P** or the external moment **M** are lower than or equal to the load capacities divided by the safety factor **z**:

$$\frac{P}{C_{0rad}} \leq \frac{1}{z} \quad \text{or} \quad \frac{P}{C_{0ax}} \leq \frac{1}{z} \quad \text{or} \quad \frac{M}{M_x \text{ (o } M_y \text{ o } M_z)} \leq \frac{1}{z} \quad [1]$$

if P is only radial
if P is only axial
if only moments are present

where **P** is the external applied load, in newton and **M** is the external applied moment, in Nm. This is valid if the external load consists of a single force or a single moment. When forces and moments are present simultaneously, as frequently happens, verification must be made to ensure that the sum of each force or applied moment complies with the following formula:

$$\frac{P_{rad}}{C_{0rad}} + \frac{P_{ax}}{C_{0ax}} + \frac{M_1}{M_x} + \frac{M_2}{M_y} + \frac{M_3}{M_z} \leq \frac{1}{z} \quad [2]$$

P_{rad}, P_{ax} are the radial and axial resultants of the applied external loads, in newton;

M_1, M_2, M_3 are the resultant external moments, in Nm.

External load **P** in a non-central position on the slider:

If the load is not centered on the slider, the distribution of the different stresses on the balls and the consequent reduction in the load capacity **C** must be considered. As shown in the diagram at right, this reduction is dependent upon the distance **d** between the center of the slider and the point of application of the external load (where **q** is the coefficient of position and the distance **d** is expressed in fractions of the slider length **S**).

The external load **P** which can be applied as a function of **d** is:



$$P = q C_{0rad} \quad \text{if the external load P is radial}$$

$$P = q C_{0ax} \quad \text{if the external load P is axial}$$

For the verification under static load and the lifetime calculation (see page D13) in the formulas (1), (2), (3), P_{rad} and P_{ax} must be replaced by the corresponding equivalent values calculated as follows:

$$P_{rad} = \frac{P}{q} \quad \text{if the external load P is radial}$$

$$P_{ax} = \frac{P}{q} \quad \text{if the external load P is axial}$$

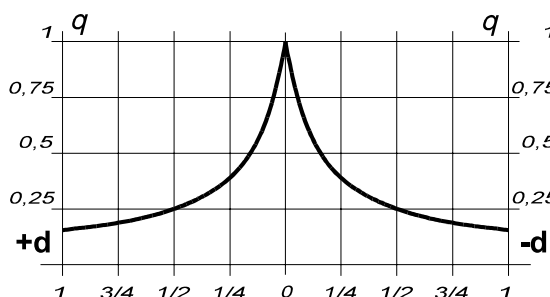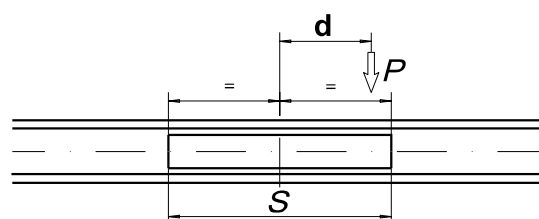

LIFETIME CALCULATION

The life of a linear ball bearing is influenced by many factors, such as applied load, working speed, precision in assembly, shocks and vibrations, operating temperature, working environment and lubrication. The definition of life is subject to interpretation: life is intended to mean the time elapsed between commencing operation and the appearance of the first signs of fatigue on the raceways of the bearings. In practice, however, it can better be defined as the functional failure of the ball bearing due to the destruction or excessive wear of one of its parts.

This can be taken into account by introducing a correction factor (f_i in the formula below).

The life may thus be calculated in compliance with the following relation:

$$L_{km} = 100 \cdot \left(\frac{C}{P_e} \cdot \frac{1}{f_i} \right)^3$$

where:

L_{km} is the calculated life, in km;

C is the dynamic load factor, in N, and is numerically equivalent to the load capacity C_{0rad} ;

P_e is the applied equivalent load, in N;

f_i is the service factor (see below table for values).

| | |
|--|---------|
| Neither shocks nor vibrations smooth and low-frequency reverse; clean working environment; low speed (< 0.5 m/s); | 1 - 1.5 |
| Light vibrations; medium speed (between 0.5 and 0.7 m/s) and medium reverse frequency; | 1.5 - 2 |
| Shocks and vibrations; high speed (> 0.7 m/s) and high reverse frequency; highly contaminated working environment; | 2 - 3.5 |

When an external load P is equal to the radial load capacity C_{0rad} (which obviously can never be exceeded), the life in ideal conditions will be 100 km ($f_i=1$). With a single external load P , then obviously $P_e=P$.

If the external load consists of several forces or moments acting simultaneously, then the equivalent external load must be calculated according to the formula:

$$P_e = P_{rad} + \left(\frac{P_{ax}}{C_{0ax}} + \frac{M_1}{M_x} + \frac{M_2}{M_y} + \frac{M_3}{M_z} \right) \cdot C_{0rad} \quad [3]$$

CLEARANCE AND PRELOAD

The linear ball bearings of the **SN** series are normally assembled with **G1** clearance, this means that between the slider and the rail there is the lowest clearance which ensures maximum smoothness. For more information, please contact our engineering department.

FRICITION COEFFICIENT

When correctly lubricated, assembled on flat rigid structures, and parallel when used in pairs, the friction coefficient is equal to or less than 0.01. This value may vary in particular assembly situations (see "**Application Notes**" on the following page).

LINEAR PRECISION

With the rail fixed with all the screws to a theoretically flat structure and with the fixing holes on this structure in a straight line, the linear precision of the path followed by the slider with respect to a fixed external reference should comply with the following relation:

$$\square = \frac{\sqrt{H}}{300} \text{ (mm)}$$

where H is the stroke of the slider in mm.

SPEED

Generally speaking, the linear ball bearings of the **SN** series can be used for speeds up to 0.8 m/s. For high movement frequencies, and therefore high accelerations during reversal of movement, it is adviseable not to use bearings with particularly long ball cages, to reduce the risk of ball cage moving out of phase (see "**Application Notes**" on the following page).

APPLICATION NOTES

The **SN** series linear ball bearings have a ball cage mounted between the rail and the slider. During movement of the slider relative to the rail, the cage moves a distance equal to half the stroke of the slider. The stroke ends when the slider contacts the bent tabs situated at the ends of the ball cage.

The ball cage usually moves in function of the slider because of the rolling motion of the balls in the raceways. Sometimes however, instead of rolling, the balls slip, causing a loss of synchronism between cage and slider, resulting in premature contact of the ball cage with the end stops thus reducing the theoretical stroke.

The theoretical stroke can be restored by slipping the slider through the ball cage until there is simultaneous contact between the end stops of the track-rail, cage and slider. This procedure is known as re-phasing. There will be a strong resistance to sliding during the rephasing stage, resulting in a temporary increase in the load applied to the track-rail.

Ball cage slipping can be caused by inaccurate assembly, movement dynamics, load values and load variations.

To reduce to a minimum the inconvenience caused by an out of phase ball cage, the recommendations given below should be followed.

The stroke should be constant for the entire working cycle and should preferably be as close as possible to the nominal stroke of the linear bearing. For applications using variable strokes, it is important to accept the possibility of rephasing the ball cage, and ensuring that there is sufficient drive capacity to allow for an occasional increase in traction, amounting to an increase in the coefficient of friction till about 0.1.

An alternative solution, already adopted by several customers, consists of periodically inserting into the working cycle a movement without load, and equal to the maximum stroke allowed by the bearing. This either prevents the ball cage from moving out of phase or rephases it automatically.

In cases where a pair of parallel linear bearings is used, any errors in parallelism or planarity of the contact surfaces during assembly will intensify phase displacement and consequent rephasing activity. If at the planning or design stage, it is anticipated that rephasing problems will occur, it is advisable to specify "**linear ball bearings with increased clearance**".

SN products can be used for horizontal movements only.

When using linear ball bearings in the **SN** series with multiple independent or synchronised sliders, if there is any uncertainty regarding the precision of the fixing surfaces for the track-rails and sliders, it's strongly recommended to use **linear bearings with increased clearance**.

For any further information, please contact our engineering department.

TEMPERATURE

SN products can be used in environments with temperatures of up to +170°C (+338 °F) (over 130°C [266°F] it is necessary to use a high temperature grease). For use at higher temperatures, contact our engineering department.

ANTICORROSIVE PROTECTION

All the elements (slider, ball cage and rail) are protected against corrosion by **electrolytic zinc plating** in compliance with ISO 2081 standards.

Upon request, other surface treatments can be done.

For any further information, please contact our engineering department.

LUBRICATION

This is largely dependent upon the working environment. Under normal conditions, lubrication should be scheduled for every **100 km** of slider travel, using a good quality lithium-soap grease of medium consistency and of the type normally used for rolling element bearings.