


Robot Module™

Motor-free Version

Maintenance-free linear axis with K1 lubrication units
High reliability due to NSK linear guides and NSK ball screws

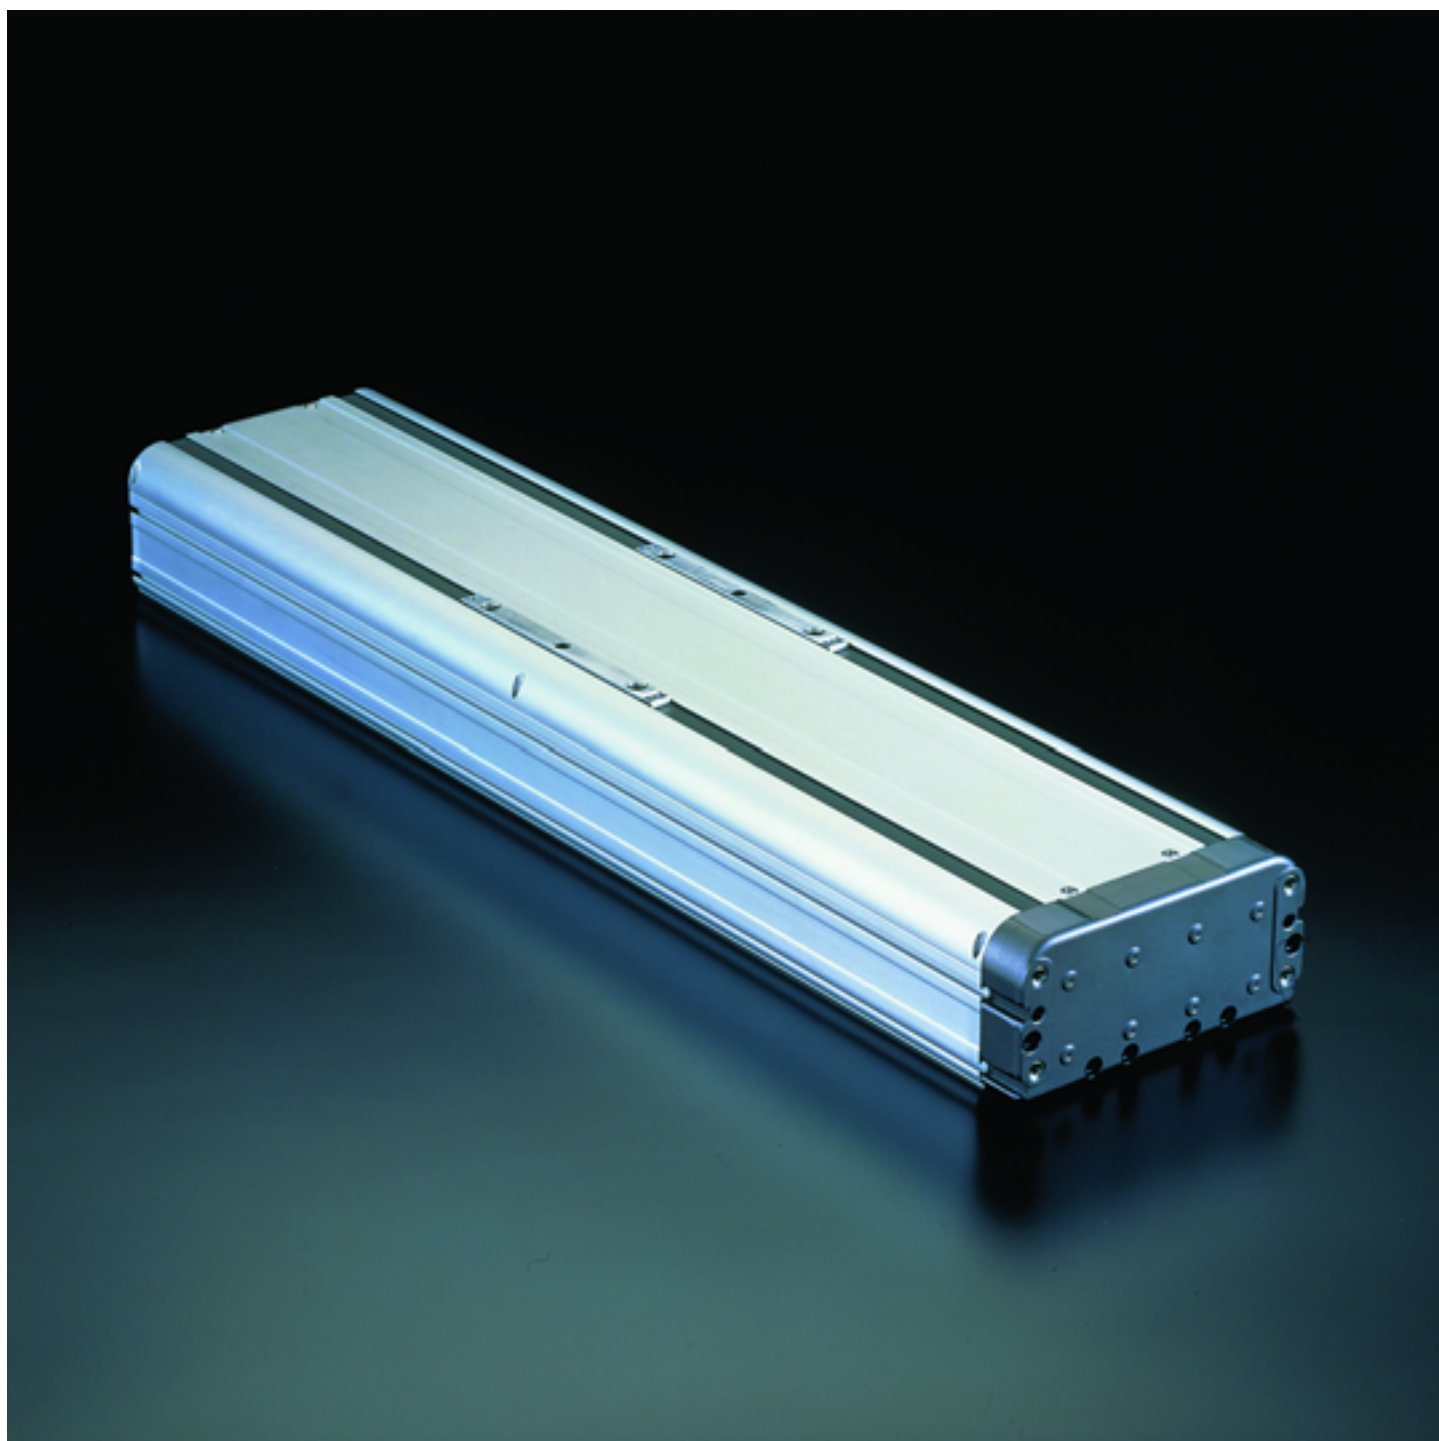

General



Robot Modules are complete linear axis systems with high precision for various automation applications in the semiconductor, electronic, medical, assembly and production areas. By the use of the high-quality NSK linear guides and NSK ball screws you can reach a high mechanical reliability.

NSK offers this sophisticated technology in an aluminium housing with an ergonomic design, on which you can assemble your servomotors.

Advantages

Utilisation of the Robot Module gives you the following advantages:

- The mechanical construction is like a machining table and you reach a high mechanical reliability.
- You save the costs of the construction of your own axis.
- Modular System: Combinations of the axis are free selectable - from a single axis system up to a portal robot with 3 axes.
- With the K1 lubrication unit the modules are maintenance-free for up to 5 years, depending on the load and duty cycle.
- The seal belt offers excellent protection against contamination entering the Robot Module.
- Due to noise isolation, operation of the axis with noise below 70dB is possible.¹⁾
- Prepared for the assembly of European motors (e.g. MKD025B-144)

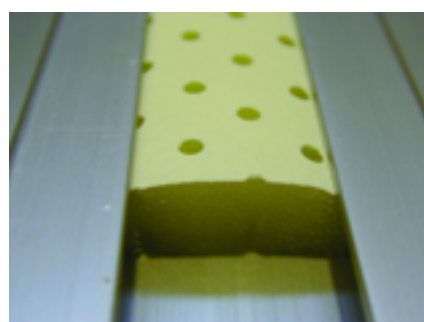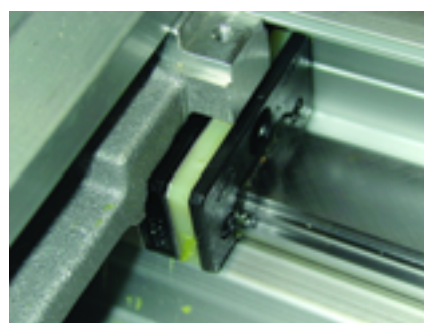

Technical Data


	H Module	M Module
Reference number	XY-HRS□□□-RH200U03	XY-HRS□□□-RM200U03
Stroke [mm]	300, 400, 500, 600, 800, 1000	250, 350, 450, 550, 750, 950
Max. velocity [mm/s]	1200 ¹⁾	
Max. load [kg]	80 ¹⁾	40 ¹⁾
Max. torque [Nm]	3,82	3,82
Max. acceleration ²⁾ [m/s ²]	50	50
Transportable moment ³⁾		
Rolling moment [Nm]	600	70
Pitching moment [Nm]	450	120
Yawing moment [Nm]	400	120
Repeatability [μm]	±10 ¹⁾	
Lead ball screw [mm]	20	
Environmental conditions	0...40°C, no condensation	

1) These values are depending from the used motor and from the driver and are valid for the optional available axis with motor.

2) Theoretical possible acceleration with small loads.

3) The transportable moment is expressed as a value at which the rated fatigue life of the linear guide will be 10000km when any unidirectional moment acts continuously on the linear guide.


Our Products



Linear guides



Ball screws



Monocarrier



Translide



Megatorque Motor®



Robot Module

- Please call me
- Please send the above marked catalogues

Name: _____

Company: _____

Address: _____

Department: _____

ZIP City: _____

Phone: _____

Fax: _____

E-mail: _____

Fax +49 (0)2102 481 2680



NSK Deutschland GmbH

Harkortstraße 15-17
40880 Ratingen
Deutschland

☎ +49 (0)2102 481 0

☎ +49 (0)2102 481 2680

✉ lineartechnik@nsk.com

NSK Europe, LTD

Northern Road
Newark
Notts NG24 2JF
United Kingdom

☎ +44 1636602850

☎ +44 1636682754

✉ precision-uk@nsk.com

NSK FRANCE, S.A.

Quartier de l'Europe
2, rue Georges Guynemer
78280 Guyancourt
France

☎ +33 130577534

☎ +33 130577570

✉ precision-fr@nsk.com

NSK ITALIA, S.P.A.

Via Garibaldi, 215
20020 Garbagnate
Milanese
Milan – Italy

☎ +39 299519227

☎ +39 299028373

✉ precision-it@nsk.com

NSK SPAIN, S.A.

Calle de la Hidráulica, 5
P.I. La Ferreria
08110 Montcada I Reixac
Barcelona – Spain

☎ +34 935726423

☎ +34 935750520

✉ precision-es@nsk.com

International Website
www.nsk.com

European Website
www.eu.nsk.com

Technical e-source Center
www.tec.nsk.com