

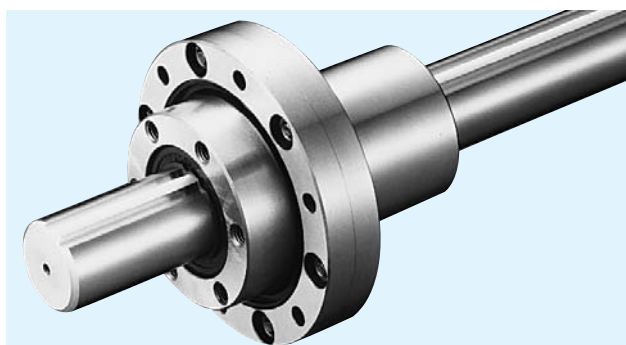


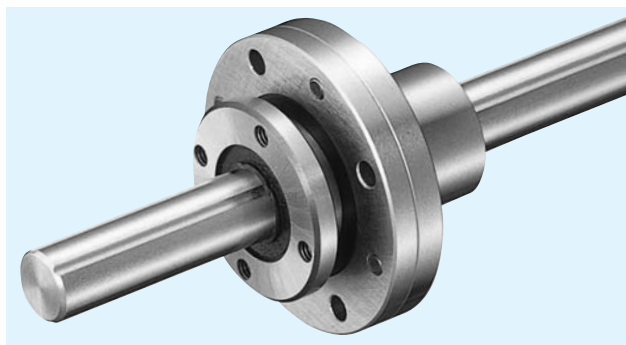


SPR TYPE

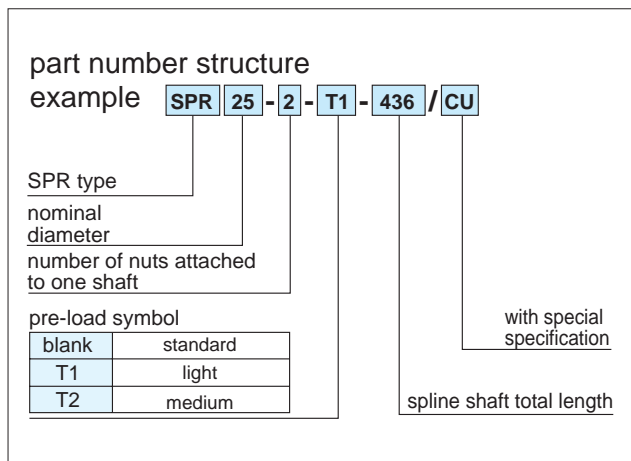

part number	ball spline major dimensions								major dimensions of support bearing							
	D ₁		D ₂	L	P ₁	S	h	I	H	D ₃		P ₂	d	G	θ°	
	mm	μm								mm	μm					
SPR 6	20		13	25	0 -0.2	16	M2	2.5	5	6.5	30	0/-21	24	2.4	φ2	20°
SPR 8	22	0	15	25		18	M2.5	3	6	6.5	33	0 -25	27	2.9		
SPR10	27	-21	19	33		22	M3	4	8	7	40		33	3.4		
SPR13	29		24	36		24	M3	5	8	9	50	0 -30	42	3.4	φ3	15°
SPR16	36		31	50		30	M4	6	10	11	60		50	4.5		
SPR20A	44		35	63		38	M4	7	12	13	72		62	4.5		
SPR20	40	0	34	60		34	M4	7	12	13	66		56	4.5		
SPR25A	55	-25	42	71		47	M5	8	13	16	82		72	4.5		
SPR25	50		40	70		42	M5	8	13	16	78		68	4.5		
SPR30	61	0	47	80		52	M6	10	17	17	100		0	86	6.6	M6 × 0.75
SPR40	76	-30	62	100	64	M6	10	23	20	120	-35		104	9		
SPR50	88	0	75	112	77	M8	13	24	22	130	0		114	9		
SPR60	102	-35	90	127	90	M8	13	25	25	150	-40		132	9		

ROTARY BALL SPLINE

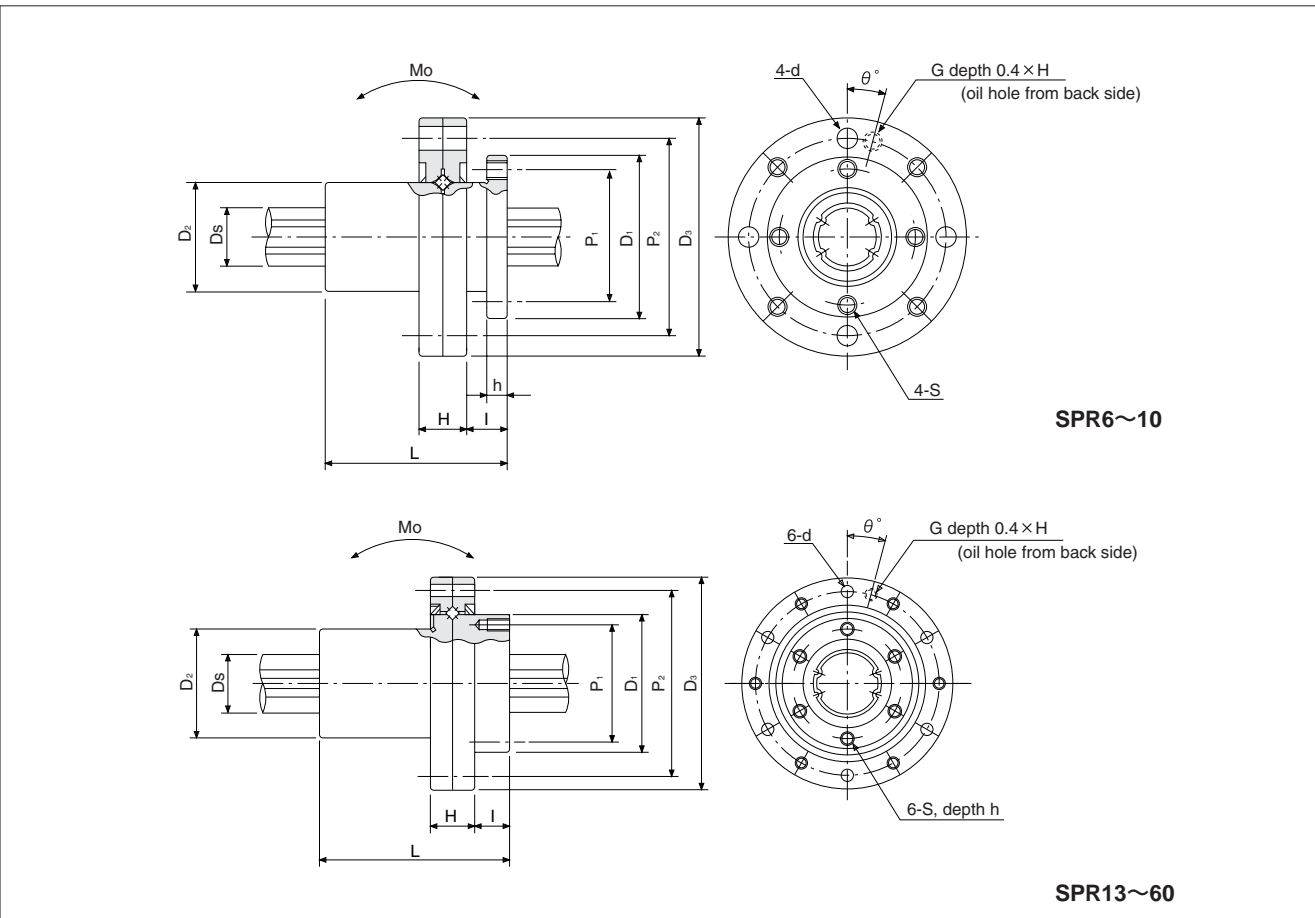

spline shaft		ball spline				support bearing		allowable static moment	second cross-sectional moment of inertia	cross-sectional coefficient	mass		※maximum rotational speed	part number
Ds	tolerance	basic torque rating		basic load rating		basic load rating					nut	spline shaft		
mm	μm	C _T N·m	C _{OT} N·m	C kN	C _o kN	C _R kN	C _{OR} kN	Mo N·m	mm ⁴	mm ³	kg	kg/m		
6	0/-12	1.5	2.4	1.22	2.28	0.6	0.5	5.1	5.9 × 10 ³	1.97 × 10 ¹	0.04	0.21	3,500	SPR 6
8	0	2.1	3.7	1.45	2.87	1.2	1.14	7.4	1.9 × 10 ³	4.76 × 10 ¹	0.05	0.38	3,500	SPR 8
10	-15	4.4	8.2	2.73	5.07	2.4	2.45	18.0	4.61 × 10 ³	9.22 × 10 ¹	0.09	0.60	3,000	SPR10
13	0	21	39.2	2.67	4.89	3.0	3.70	13.7	1.38 × 10 ³	2.13 × 10 ²	0.17	1.0	1,800	SPR13
16	-18	60	110	6.12	11.2	5.6	6.70	46	2.98 × 10 ³	3.73 × 10 ²	0.33	1.5	1,500	SPR16
20	0 -21	105	194	8.9	16.3	6.61	7.89	63	7.35 × 10 ³	7.34 × 10 ²	0.57	2.4	1,100	SPR20A
18.2		83	133	7.84	11.3	5.90	7.35	63	5.05 × 10 ³	5.54 × 10 ²	0.45	2.0	1,200	SPR20
25		189	346	12.8	23.4	10.0	13.4	171	1.79 × 10 ⁴	1.43 × 10 ³	0.81	3.7	900	SPR25A
23		162	239	12.3	16.1	9.11	11.5	104	1.27 × 10 ⁴	1.11 × 10 ³	0.75	3.1	1,000	SPR25
28		289	412	18.6	23.2	13.2	18.0	181	2.75 × 10 ⁴	1.96 × 10 ³	1.25	4.8	800	SPR30
37.4	0	637	882	30.8	37.5	22.8	32.3	358	8.73 × 10 ⁴	4.67 × 10 ³	2.30	8.6	800	SPR40
47	-25	1,390	3,180	46.1	74.2	27.2	42.1	696	2.16 × 10 ⁵	9.21 × 10 ³	3.10	13.1	570	SPR50
56.5	0/-30	2,100	4,800	58.0	127.4	30.0	48.2	1,300	4.51 × 10 ⁵	1.60 × 10 ⁴	4.70	19	500	SPR60

※Maximum rotational speed for grease lubrication.

1kN ≅ 102kgf 1N·m ≅ 0.102kgf·m

Contact NB for further information when higher speeds or oil lubrication is required.

SLIDE GUIDE
 BALL SPLINE
 ROTARY BALL SPLINE
 STROKE BALL SPLINE
 TOPBALL® PRODUCTS
 SLIDE BUSH
 SLIDE UNIT
 STROKE BUSH
 SLIDE ROTARY BUSH
 SLIDE SHAFT
 SLIDE WAY/GONIO WAY
 SLIDE TABLE
 MINIATURE SLIDE
 ACTUATOR
 SLIDE SCREW